



KONICA MINOLTA

bizhub 25e

✓ Black & white A4 multifunctional

✓ Up to 25 pages per minute

Functionality



Copying

– Black & white



Printing

– Black & white
– GDI/PCL/PS
– Local/network
– USB




Scanning

– Colour
– Black & white
– Scan-to-eMail
– Scan-to-SMB
– Scan-to-FTP
– Scan-to-USB
– TWAIN local/
network



Faxing


– Super G3 Fax
– PC-Fax
– i-Fax

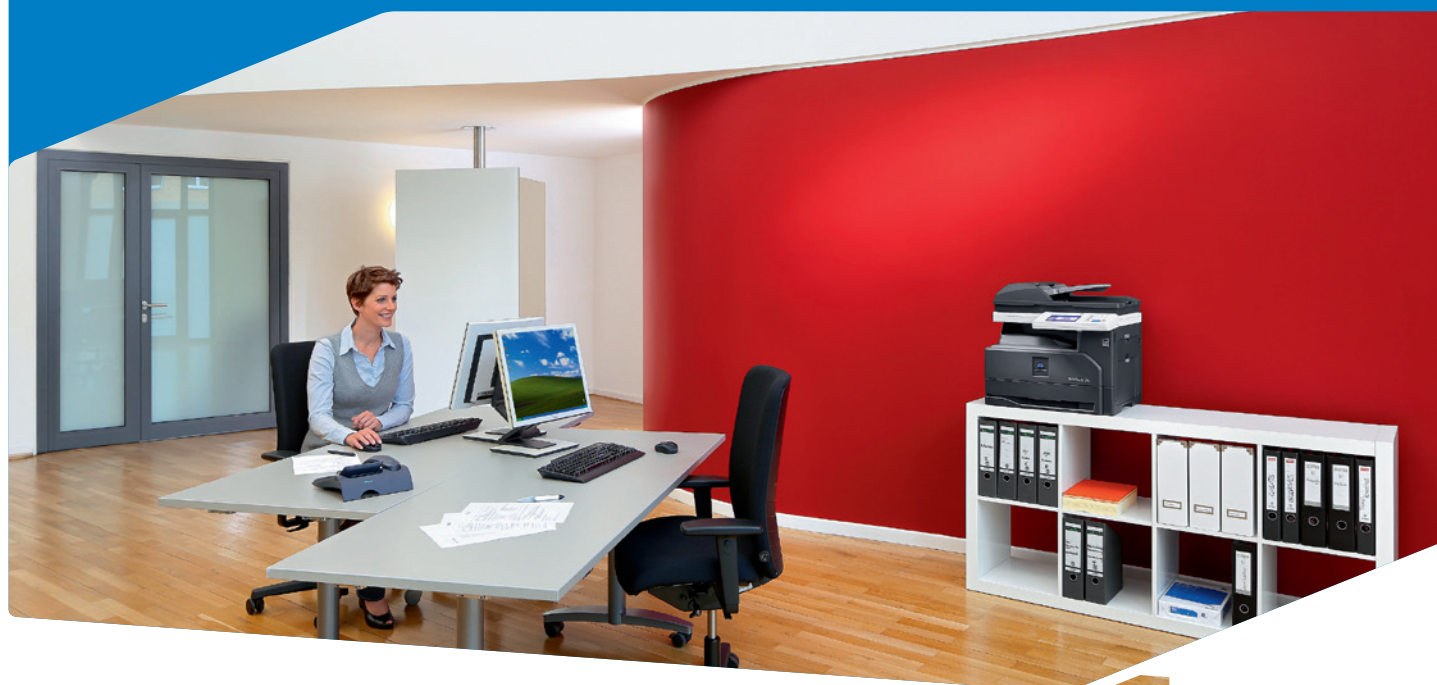

Technology

EMPERON™	SIMITRI® HD TONER	IWS	OPEN API	i-OPTION	CSRC
X	X	X	X	X	✓

Option diagram

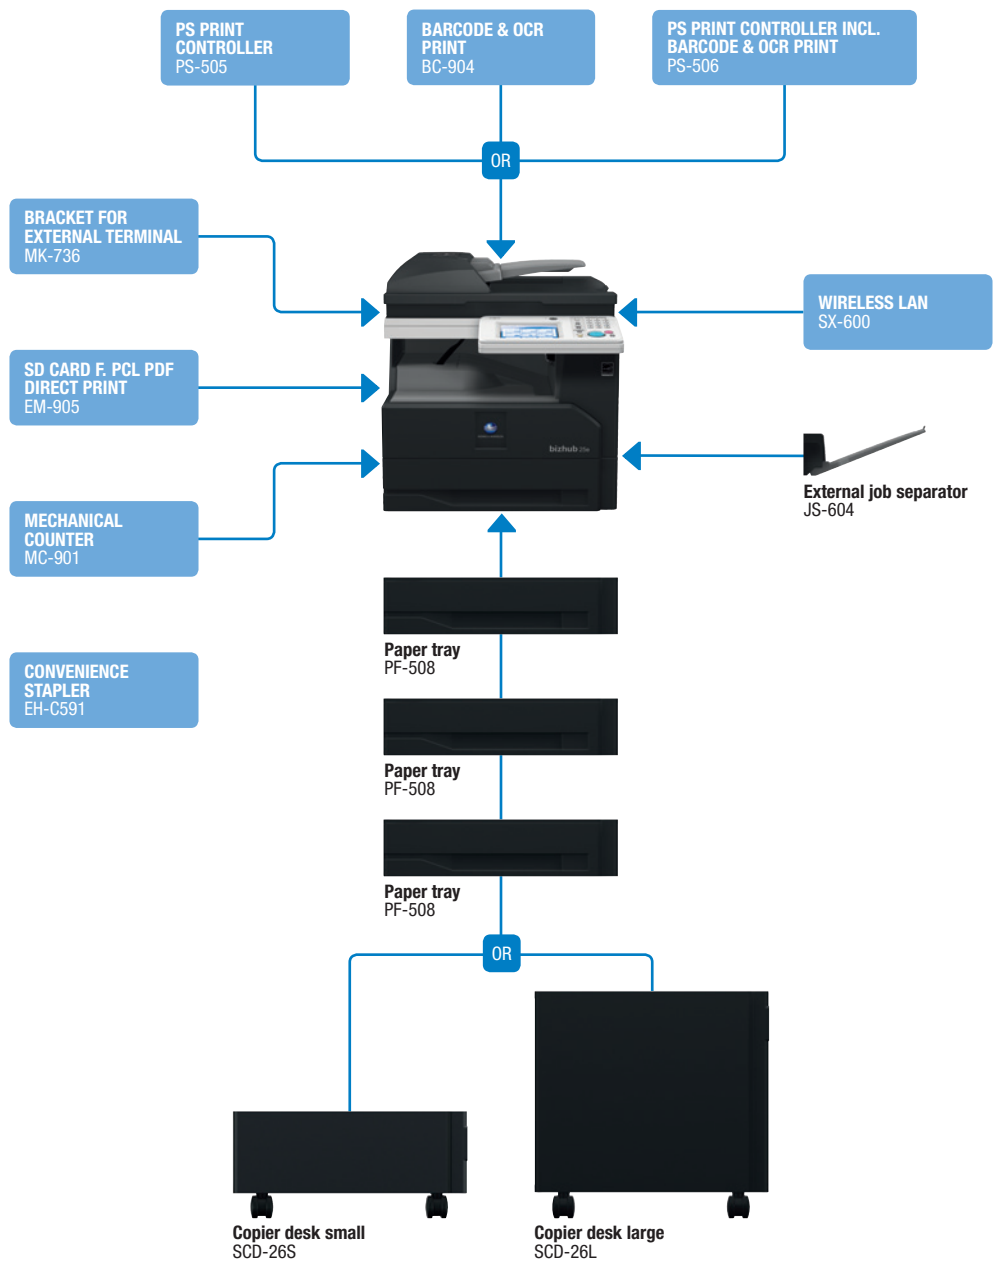

Finishing options



Duplex

Descriptions

bizhub 25e	Multifunctional black & white device (print, copy, scan, fax) with 25 ppm. Standard network functionality. GDI and PCL print. Reverse document feeder standard. Standard duplex unit. Standard paper capacity of 600 sheets.
PF-508 Paper cassette	A4, 500 sheets, up to 80 gsm; up to 3 can be installed
SCD-26S Copier desk small	Provides storage space for print media, etc.; in case 2 or 3 PF-508 are installed
SCD-26L Copier desk large	Provides storage space for print media, etc.; in case 0 or 1 PF-508 is installed
JS-604 External job separator	Additional output tray, separation for fax output etc.
PS-505 PS print controller	PostScript 3 printing
BC-904 Barcode & OCR print	Barcode and OCR font printing

PS-506 PS print controller incl. Barcode & OCR print	PostScript 3 printing including Barcode and OCR font printing
EM-905 SD card for PCL PDF direct print	SD card memory extension; enables PCL PDF direct printing
MC-901 Mechanical counter	Mechanical counter
MK-736 Bracket for external terminal	Required to install external accounting terminal
SX-600 Wireless LAN	Wireless LAN to network connector
EH-C591 Convenience stapler	External stapler; convenient stapling of up to 50 sheets

Technical specifications

COPIER SPECIFICATIONS

Copying process	Electrostatic LED copy, mono component
Toner system	Polymerised toner
Copy/print speed A4	Up to 25 ppm
Autoduplex speed A4	Up to 10 ppm
1st copy out time	5 sec.
Warm-up time	Approx. 12 sec. ¹
Copy resolution	600 x 600 dpi
Multi copy	1–99
Gradation	256 gradations
Original format	Max. A4
Magnification	25–400 % in 1 % steps
Copy functions	Duplex copy, electronic sorting, rotation copy, 2in1, 4in1, ID card copy, custom size settings

PRINTER SPECIFICATIONS

Print resolution	600 x 600 dpi
Controller CPU	366 MHz
Page description language	GDI PCL 5e/XL PostScript 3 (optional) PDF direct print (optional) Barcode and OCR fonts printing (optional)
Operating systems	Windows XP (32/64) Windows VISTA (32/64) Windows 7 (32/64) Windows 8 (32/64) Windows Server 2003/2008 (32/64), 2008 R2 (64), 2012 (64) Macintosh OS X 10.x Unix, Linux, Citrix SAP AS/400
Printer fonts	80 PCL Latin 136 PostScript 3 Emulation Latin (optional) 32 Barcode/OCR (optional)
Print functions	Duplex printing, cover sheet, electronic sorting, density adjustment, toner save mode, n-up, watermark (only PCL, PostScript 3), secure print

SCANNER SPECIFICATIONS

Scan speed (mono/colour)	Up to 40 opm Up to 27 opm
Scan resolution	Max.: 600 x 600 dpi
Scan modes	Scan-to-eMail Scan-to-SMB Scan-to-FTP Scan-to-USB TWAIN local/network
File formats	PDF, encrypted PDF, TIFF, JPEG
Scan destinations	1,030 (single + group); LDAP support

¹ Warm up time may vary depending on the operating environment and usage



FAX SPECIFICATIONS

Fax standard	Super G3
Fax transmission	Analogue PC-Fax; i-Fax
Fax resolution	Max.: 406 x 392 dpi
Fax compression	MH; MR; MMR; JBIG
Fax modem	Up to 33.6 Kbps
Fax destinations	1,030
Fax functions	Time shift, automatic fax forwarding

SYSTEM SPECIFICATIONS

System memory	512 MB + 128 MB SD card
Interface	10-Base-T/100-Base-TX; USB 2.0
Network protocols	TCP/IP (IPv4, IPv6); IPP, SNMP, HTTP, HTTPS
Frame types	Ethernet II
Automatic document feeder	Up to 80 originals; A5–A4; 35–128 gsm Reversing automatic document feeder
Printable paper size	A6–A4, customised paper sizes (90–216 x 140–356 mm)
Printable paper weight	60–160 gsm
Paper input capacity	Standard: 600 sheets Max.: 2,100 sheets
Tray 1	500 sheets, A5–A4, 60–90 gsm
Tray 2–4 (optional)	500 sheets each, A5–A4, 60–90 gsm
Manual bypass	100 sheets, A6–A4, customised paper sizes (90–216 x 140–356 mm), 60–160 gsm
Automatic duplexing	A6–A4; 60–90 gsm
Output capacity	Std.: 250 sheets Max.: 350 sheets (incl. optional external job separator)
Copy/print volume (monthly)	Rec.: 5,000 pages; Max.: 10,000 pages
Toner lifetime	Up to 20,000 pages
Drum lifetime	Up to 42,000 pages
Power consumption	220–240 V / 50/60 Hz Less than 1.09 kW (system)
System dimensions (W x D x H)	520 x 513 x 509 mm
System weight	Approx. 24.1 kg

SYSTEM FEATURES

Security	Mac address blocking; IP address blocking; SSL; HTTPS; encrypted PDF; user authentication; secure print
Accounting	Up to 100 user accounts; Active Directory 2003 support; user function access definition (user access control)
Software	PageScope Net Care Device Manager

- All specifications refer to A4-size paper of 80 gsm quality.
- The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.
- The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (5 % coverage of A4). The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.
- Some of the product illustrations contain optional accessories.
- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- Konica Minolta does not warrant that any specifications mentioned will be error-free.
- All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.

